

Offers solutions in diverse industries and scenes!

[Applications of BHT-1200 series]

Field services ■ Delivery management ■ Inspection ■ Maintenance

- Enables high-speed wireless WAN communication from the field *BHT-1261QWB-G-CE only
- Collects work history records more accurately using GPS data *BHT-1261QWB-G-CE only



Retail/wholesale stores ■ Inventory ■ Order placement ■ Stock management ■ Inspection of incoming products ■ Delivery (customer-facing terminal)

- Large, easy-to-see screen enables smoother stock confirmation and order placement
- High-speed wireless communication enables real-time, point-of-sale stock inquiry



Distribution warehouses ■ Picking ■ Entering/shipping management ■ Inventory

- High-speed wireless connection with high staying power. Lasts all day long even when always connected by wireless
- Outstanding toughness ensures secure operations even under rough handling conditions



Plants ■ Process management ■ Production management ■ Traceability

- High-speed scanning of QR codes enables smooth centralized management of process progress. Also improves efficiency in production management
- Fast wireless communication even in large plants



DENSO WAVE Quality Chosen based on customers' confidence in us and our achievements.

Rich experience

Pioneering company, established in 1978, in the automatic recognition field whose products boast the No. 1 spot for the number of units in use.

Long-term support

Even after sales end, 5-year support is guaranteed.

Reliable, integrated production system

Denso Wave is engaged in every aspect of a product, its development, production, marketing and maintenance.

Superior engineering prowess

Denso Wave is the company that developed QR Code, used all over the world.

DENSO

BHT-1200 series specification

Type	Bar code model				2D code model			
	Bluetooth® + Wireless LAN				Bluetooth® + Wireless LAN			
OS	Windows Embedded CE 6.0 R3	Windows Embedded Compact 7	Windows Embedded Compact 7	Windows Embedded Compact 7	Windows Embedded CE 6.0 R3	Windows Embedded Compact 7	Windows Embedded Compact 7	Windows Embedded Compact 7
CPU	ARM Cortex-A8 800MHz	ARM Cortex-A8 800MHz	ARM Cortex-A8 800MHz	ARM Cortex-A8 800MHz	ARM Cortex-A8 800MHz	ARM Cortex-A8 800MHz	ARM Cortex-A8 800MHz	ARM Cortex-A8 800MHz
Memory	RAM	2GB	2GB	2GB	RAM	2GB	2GB	2GB
Flash ROM	2GB	2GB	2GB	2GB	2GB	2GB	2GB	2GB
Display	Number of Dots*1	3.5 inch HVGA (320 x 480 dots)	3.5 inch HVGA (320 x 480 dots)	3.5 inch HVGA (320 x 480 dots)	3.5 inch HVGA (320 x 480 dots)	3.5 inch HVGA (320 x 480 dots)	3.5 inch HVGA (320 x 480 dots)	3.5 inch HVGA (320 x 480 dots)
Display device	Liquid crystal dot matrix display (color)	Liquid crystal dot matrix display (color)	Liquid crystal dot matrix display (color)	Liquid crystal dot matrix display (color)	Liquid crystal dot matrix display (color)	Liquid crystal dot matrix display (color)	Liquid crystal dot matrix display (color)	Liquid crystal dot matrix display (color)
Back light	White LED	White LED	White LED	White LED	White LED	White LED	White LED	White LED
Scanner	Mode	Advanced scan plus (CCD)	Advanced scan plus (CCD)	Advanced scan plus (CCD)	Area sensor	Area sensor	Area sensor	Area sensor
Decode	Bar code	EAN-13/8 (JAN-13/8), UPC-A/E, UPC-EAN (Add-on embedded), Interleaved 2 of 5, Standard 2 of 5, CODABAR (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), MSI, GS1 DataBar (RSS)	EAN-13/8 (JAN-13/8), UPC-A/E, UPC-EAN (Add-on embedded), Interleaved 2 of 5, Standard 2 of 5, CODABAR (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), MSI, GS1 DataBar (RSS)	EAN-13/8 (JAN-13/8), UPC-A/E, UPC-EAN (Add-on embedded), Interleaved 2 of 5, Standard 2 of 5, CODABAR (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), MSI, GS1 DataBar (RSS)	EAN-13/8 (JAN-13/8), UPC-A/E, UPC-EAN (Add-on embedded), Interleaved 2 of 5, Standard 2 of 5, CODABAR (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), MSI, GS1 DataBar (RSS)	EAN-13/8 (JAN-13/8), UPC-A/E, UPC-EAN (Add-on embedded), Interleaved 2 of 5, Standard 2 of 5, CODABAR (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), MSI, GS1 DataBar (RSS)	EAN-13/8 (JAN-13/8), UPC-A/E, UPC-EAN (Add-on embedded), Interleaved 2 of 5, Standard 2 of 5, CODABAR (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), MSI, GS1 DataBar (RSS)	EAN-13/8 (JAN-13/8), UPC-A/E, UPC-EAN (Add-on embedded), Interleaved 2 of 5, Standard 2 of 5, CODABAR (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), MSI, GS1 DataBar (RSS)
2D code	QR code, micro QR code, SQR code, iQR code, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 Composite	QR code, micro QR code, SQR code, iQR code, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 Composite	QR code, micro QR code, SQR code, iQR code, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 Composite	QR code, micro QR code, SQR code, iQR code, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 Composite	QR code, micro QR code, SQR code, iQR code, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 Composite	QR code, micro QR code, SQR code, iQR code, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 Composite	QR code, micro QR code, SQR code, iQR code, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 Composite	QR code, micro QR code, SQR code, iQR code, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 Composite
Minimum resolution	Bar code	0.125mm	0.10mm	0.125mm	0.10mm	0.125mm	0.10mm	0.125mm
2D code	0.167mm	0.167mm	0.167mm	0.167mm	0.167mm	0.167mm	0.167mm	0.167mm
Reading reference position	170mm	140mm	170mm	140mm	170mm	140mm	170mm	140mm
Maker	Area guide maker	Area guide maker	Area guide maker	Area guide maker	Area guide maker	Area guide maker	Area guide maker	Area guide maker
Scan Confirmation	LED in two colors: Blue/red, speaker, vibration	LED in two colors: Blue/red, speaker, vibration	LED in two colors: Blue/red, speaker, vibration	LED in two colors: Blue/red, speaker, vibration	LED in two colors: Blue/red, speaker, vibration	LED in two colors: Blue/red, speaker, vibration	LED in two colors: Blue/red, speaker, vibration	LED in two colors: Blue/red, speaker, vibration
Key input section	Number of keys	31 keys (excluding the power key) + 3 trigger keys	31 keys (excluding the power key) + 3 trigger keys	31 keys (excluding the power key) + 3 trigger keys	31 keys (excluding the power key) + 3 trigger keys	31 keys (excluding the power key) + 3 trigger keys	31 keys (excluding the power key) + 3 trigger keys	31 keys (excluding the power key) + 3 trigger keys
Network	Wireless LAN	Subtle standard	Comply with IEEE802.11b/g/n*	Comply with IEEE802.11b/g/n*	Comply with IEEE802.11b/g/n*	Comply with IEEE802.11b/g/n*	Comply with IEEE802.11b/g/n*	Comply with IEEE802.11b/g/n*
Frequency	IEEE802.11b/g/n (2.4GHz)	IEEE802.11b/g/n (2.4GHz)	IEEE802.11b/g/n (2.4GHz)	IEEE802.11b/g/n (2.4GHz)	IEEE802.11b/g/n (2.4GHz)	IEEE802.11b/g/n (2.4GHz)	IEEE802.11b/g/n (2.4GHz)	IEEE802.11b/g/n (2.4GHz)
Network range*3	Indoor: about 150m, outdoor: about 300m	Indoor: about 150m, outdoor: about 300m	Indoor: about 150m, outdoor: about 300m	Indoor: about 150m, outdoor: about 300m	Indoor: about 150m, outdoor: about 300m	Indoor: about 150m, outdoor: about 300m	Indoor: about 150m, outdoor: about 300m	Indoor: about 150m, outdoor: about 300m
Transmission speed*4	IEEE802.11b: 11/5.5/2/1Mbps, IEEE802.11g: 54/48/36/24/18/12/9/6Mbps, IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5Mbps	IEEE802.11b: 11/5.5/2/1Mbps, IEEE802.11g: 54/48/36/24/18/12/9/6Mbps, IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5Mbps	IEEE802.11b: 11/5.5/2/1Mbps, IEEE802.11g: 54/48/36/24/18/12/9/6Mbps, IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5Mbps	IEEE802.11b: 11/5.5/2/1Mbps, IEEE802.11g: 54/48/36/24/18/12/9/6Mbps, IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5Mbps	IEEE802.11b: 11/5.5/2/1Mbps, IEEE802.11g: 54/48/36/24/18/12/9/6Mbps, IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5Mbps	IEEE802.11b: 11/5.5/2/1Mbps, IEEE802.11g: 54/48/36/24/18/12/9/6Mbps, IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5Mbps	IEEE802.11b: 11/5.5/2/1Mbps, IEEE802.11g: 54/48/36/24/18/12/9/6Mbps, IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5Mbps	IEEE802.11b: 11/5.5/2/1Mbps, IEEE802.11g: 54/48/36/24/18/12/9/6Mbps, IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5Mbps
Security	WEP40/128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), WPA2-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), 802.1 x (EAP-TLS, PEAP, LEAP, EAP-FAST/WEP)	WEP40/128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), WPA2-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), 802.1 x (EAP-TLS, PEAP, LEAP, EAP-FAST/WEP)	WEP40/128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), WPA2-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), 802.1 x (EAP-TLS, PEAP, LEAP, EAP-FAST/WEP)	WEP40/128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), WPA2-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), 802.1 x (EAP-TLS, PEAP, LEAP, EAP-FAST/WEP)	WEP40/128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), WPA2-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), 802.1 x (EAP-TLS, PEAP, LEAP, EAP-FAST/WEP)	WEP40/128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), WPA2-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), 802.1 x (EAP-TLS, PEAP, LEAP, EAP-FAST/WEP)	WEP40/128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), WPA2-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), 802.1 x (EAP-TLS, PEAP, LEAP, EAP-FAST/WEP)	WEP40/128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), WPA2-1 x (TKIP, AES/EAP-TLS, PEAP, LEAP, EAP-FAST), 802.1 x (EAP-TLS, PEAP, LEAP, EAP-FAST/WEP)
Wireless WAN	—	—	—	—	—	—	—	—
Bluetooth	Bluetooth Ver2.0 + EDR based class 2	Bluetooth Ver2.1 + EDR based class 2	Bluetooth Ver2.1 + EDR based class 2	Bluetooth Ver2.1 + EDR based class 2	Bluetooth Ver2.1 + EDR based class 2	Bluetooth Ver2.1 + EDR based class 2	Bluetooth Ver2.1 + EDR based class 2	Bluetooth Ver2.1 + EDR based class 2
Cradle I/F	RS-232C / USB client OTG	RS-232C / USB client OTG	RS-232C / USB client OTG	RS-232C / USB client OTG	RS-232C / USB client OTG	RS-232C / USB client OTG	RS-232C / USB client OTG	RS-232C / USB client OTG
GPS	—	—	—	—	—	—	—	—
Card slot	MicroSDHC/MicroSD card (~32GB)×1	MicroSDHC/MicroSD card (~32GB)×1	MicroSDHC/MicroSD card (~32GB)×1	MicroSDHC/MicroSD card (~32GB)×1	MicroSDHC/MicroSD card (~32GB)×1	MicroSDHC/MicroSD card (~32GB)×1	MicroSDHC/MicroSD card (~32GB)×1	MicroSDHC/MicroSD card (~32GB)×1
Camera	5.0M pixel (5.0 megapixel) Camera with automatic focusing function	5.0M pixel (5.0 megapixel) Camera with automatic focusing function	5.0M pixel (5.0 megapixel) Camera with automatic focusing function	5.0M pixel (5.0 megapixel) Camera with automatic focusing function	5.0M pixel (5.0 megapixel) Camera with automatic focusing function	5.0M pixel (5.0 megapixel) Camera with automatic focusing function	5.0M pixel (5.0 megapixel) Camera with automatic focusing function	5.0M pixel (5.0 megapixel) Camera with automatic focusing function
Power	Main battery	Lithium-ion battery	Lithium-ion battery	Lithium-ion battery	Lithium-ion battery	Lithium-ion battery	Lithium-ion battery	Lithium-ion battery
Operating time*5	With standard battery	Approx. 23 hrs*6	Approx. 23 hrs*6	Approx. 23 hrs*6	Approx. 23 hrs*6	Approx. 23 hrs*6	Approx. 23 hrs*6	Approx. 23 hrs*6
With large-capacity battery	Approx. 34 hrs*6	Approx. 34 hrs*6	Approx. 34 hrs*6	Approx. 34 hrs*6	Approx. 34 hrs*6	Approx. 34 hrs*6	Approx. 34 hrs*6	Approx. 34 hrs*6
Additional functionality	Clock, speaker, vibration, battery voltage indicator, key back light, G-sensor, microphone receiver	Clock, speaker, vibration, battery voltage indicator, key back light, G-sensor, microphone receiver	Clock, speaker, vibration, battery voltage indicator, key back light, G-sensor, microphone receiver	Clock, speaker, vibration, battery voltage indicator, key back light, G-sensor, microphone receiver	Clock, speaker, vibration, battery voltage indicator, key back light, G-sensor, microphone receiver	Clock, speaker, vibration, battery voltage indicator, key back light, G-sensor, microphone receiver	Clock, speaker, vibration, battery voltage indicator, key back light, G-sensor, microphone receiver	Clock, speaker, vibration, battery voltage indicator, key back light, G-sensor, microphone receiver
Environmental performance	Operating temperature	-20~50°C*8	-20~50°C*8	-20~50°C*8	-20~50°C*8	-20~50°C*8	-20~50°C*8	-20~50°C*8
Protection rating	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54
Drop resistance*9	0.2m x over 1000 times / 1.5m x 30 times (5 times on each six sides) on a concrete floor	0.2m x over 1000 times / 1.5m x 30 times (5 times on each six sides) on a concrete floor	0.2m x over 1000 times / 1.5m x 30 times (5 times on each six sides) on a concrete floor	0.2m x over 1000 times / 1.5m x 30 times (5 times on each six sides) on a concrete floor	0.2m x over 1000 times / 1.5m x 30 times (5 times on each six sides) on a concrete floor	0.2m x over 1000 times / 1.5m x 30 times (5 times on each six sides) on a concrete floor	0.2m x over 1000 times / 1.5m x 30 times (5 times on each six sides) on a concrete floor	0.2m x over 1000 times / 1.5m x 30 times (5 times on each six sides) on a concrete floor
Mass (including battery, stylus pen, hand belt)*10	Approx. 330g	Approx. 330g	Approx. 330g	Approx. 330g	Approx. 330g	Approx. 330g	Approx. 330g	Approx. 330g

* 1: The liquid panel is made with high-precision technology. Though the number of pixels available is 99.99%, please understand that there is 0.01% chance of the display being scrambled and turned off. * 2: BHT-1200 supports IEEE802.11a in some regions. * 3: Network range and transmission speed are logical variables and accordingly, these may vary depending on the actual environmental condition. * 4: The available frequency may differ according to region. * 5: Operating times shown are reference values at room temperature and may vary depending on working conditions. * 6: Ratio of scanning : wireless communication : screen update : standby = 1:1:1:20. The vibrator and buzzer are disabled, the power save mode is ON (Fast/PS), and the wireless function is enabled only when the terminal is connecting to the wireless network; the wireless function is disabled otherwise. * 7: Ratio of scanning : screen display : wireless communication : standby = 1:9:20:270 under continuous wireless WAN connection, and the vibrator, back light, and buzzer are disabled. * 8: The temperature rises from 0 to 40°C while charging. * 9: This is a test value, not a guaranteed value. * 10: The value when using the standard battery

Option (sold separately)

- Holder, which performs data communication with BHT communication unit and the up-level device
- CU-1233(RS-232C/USB communication + main body charging + reserve battery charging)
- CU-1211(Ethernet communication + main body charging + reserve battery charging)

	CU-1233	CU-1211
Communication mode	Compy with RS-232/USB2.0 Full speed	Ethernet (100BASE-TX)
Charging time (main body)	Standard battery: about 3 hours, high-capacity battery: about 4.5 hours	
Reserve charging	Standard battery: about 3 hours, high-capacity battery: about 4.5 hours	
Size	133(D)x97(W)x101(H)	
Working voltage	AC adapter (AD3-1012/3000-2)	
●Battery		
BHT reserve battery		
• BT-110LA (standard battery only)		
• BT-120LA-C (standard battery + battery cover)		
• BT-110L (high-capacity battery only)		
• BT-120L-C (high-capacity battery + battery cover)		
●Recharger		
• CH-1104 (4 serial battery rechargers)		
• CH-1254 (4 serial unit rechargers)		
●Soft case and others		
• SCBHT-1200 (Soft case)		
• SCBHT-1200-3G (Soft case for BHT-1261QWBG-CE)		
• VHBHT-1100/1200 (waist-pack case)		
• SBBHT-700 (shoulder-belt)		
●Communication cable		
• CBBHT-US1800 / C12-4A		
*The BHT-1200 can be charged by connecting to a USB charger or other power adapter. When charging the BHT-1200, use a power adapter that satisfies the following output and USB charging specifications: (voltage) DC5±0.25 V(current) 1.2 A or Higher		

* The BHT-1200 can be charged by connecting to a USB charger or other power adapter. When charging the BHT-1200, use a power adapter that satisfies the following output and USB charging specifications.

Output specifications: (voltage) DC5.0±0.25 V/(current) 1.2 A or higher USB charging specification: Battery Charging Specification Rev. 1.2

Components

- Hand-belt
- Stylus pen
- Instruction manual
- Guidelines for operation

Software

- Development tools
 - Software Development Kit (SDK) for BHT Windows® CE** 1, 2
 - Software Development Kit (SDK) for Windows® Embedded Compact 7** 1, 3
- Preinstalled Software applications
 - Keyboard interface software [kbiCE]
 - Launcher [Application Launcher]
 - Wireless connection setup tool [Wlan Manager]
 - Backup tool [BHT Backup]

*1: This software application is available free of charge from the site to customers who have purchased BHT Windows.
*2: This software application is for Windows Embedded CE 6.0 R3-based models.
*3: This software application is for Windows Embedded Compact 7-based models.

Items with this mark are available from the company's homepage (Qbdirect) free of charge.

For more information, please visit our website

<http://www.denso-wave.com/en/adcd/>

*Appearance and specifications are subject to change without prior notice. *Description stated in this catalogue is as of December, 2014

DENSO WAVE INCORPORATED

DENSO



HANDY TERMINAL

BHT-1200 SERIES



Bar code model

- Bluetooth® + Wireless LAN
- BHT-1261BWB-CE
- BHT-1261BWB-CE (H)
- BHT-1261BWB-CE (WEC7)
- BHT-1261BWB-CE (H-WEC7)



2D code model

- Bluetooth® + Wireless LAN
- BHT-1261QWB-CE
- BHT-1261QWB-CE (WEC7)
- Bluetooth® + Wireless LAN and WWAN/GPS
- BHT-1261QWB-G-CE

Windows® Embedded Compact 7-based models launched!!



Best design, which makes it easier to grip and simple to operate



Fast wireless communication, supporting IEEE802.11b/g/n
*BHT-1200 supports IEEE802.11a in some regions.



Wireless WAN function enables real-time acquisition of GPS data
*BHT-1261QWB-G-CE only



Increase the work efficiency with overwhelming scan-performance



Increase business efficiency. Expand functionality. Global model with high specifications

Easy to operate

Strengthen the advantages of PDA and make up for the weaknesses



Simple to operate with only one hand, even with just your thumbs

Keys are placed and arranged to enable one-handed operation



Easy to grip

About the size of a smartphone (57mm) and with a slim-shape that fits easily in your hands



Stable grip

Stable to use, by holding the handle in one hand



12 functional keys

Set up frequently used functions with sufficient numbers of functional keys. You can use the product in a dark place, thanks to the key back light



The big screen allows you to see the information easily at a glance

Display screen with 3.5 inch high-precision HVGA clearly shows even small-sized characters



"Professional-standard" long-lasting operation!

Unique power-saving design enables long-time operation of approximately 34 hours* (with large-capacity battery)

*For barcode model. Approx. 33 hours for 2D code model




Long-time operation of approx. 34 hours!



Global support system

Experience Japanese levels of quality and service, worldwide



Usable worldwide! Comprehensive support system also available!

DENSO group operates globally, providing prompt support across a full range of services, from sales to maintenance. Language options allow you to change the language being displayed.


<Countries using the BHT-1200>
Japan, Europe, Australia, North America, and Asia
* For details, contact our sales representative.

Support an integrated management tool with the world's largest market share. Drastically reduce the cost and effort required for application updates.

BHT-1200 supports MobiControl, an integrated management tool for terminals*. Regardless of whether it is used in Japan or overseas, the terminal is managed by the management server, resulting in a reduction in the cost and effort required to run it, and meaning it runs seamlessly, saving you stress.
* A separate contract is required to use MobiControl.


Examples of using MobiControl

- Synchronize the management server and the terminal
Collect data from each terminal and distribute the data stored on the server
- Identify the fault of the terminal where the error has occurred
Compare and analyze the terminal program to find the cause of failure
- Installing the software automatically updates it
Easy to update and install the unit application
- Enhanced security against leakage of information
Embedded with security functions against loss of terminal, server attack and information leakage

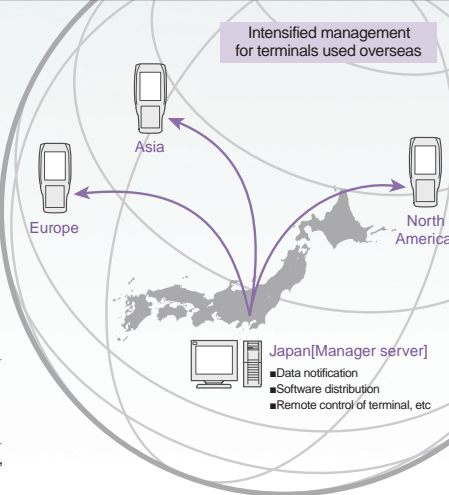


Wireless and security

The stability and speed required for business-use




Fast wireless communication
Avoid delays caused by congestion

Support IEEE802.11b/g/n. High-speed communication, without congestion in wireless network. Connect to the wireless network in 1 second, using the company's own driver



Prevent unauthorized access and wiretapping

Embedded with WPA/WPA2, highly reliable security technique, together with WEP



Remote desktop offers smooth operation!

"Remote desktop plug-in" enables thin client implementation with lower development costs. When remotely connected to a server, the server screen can be displayed directly on each terminal, allowing control of buzzer, LED and other BHT devices from each terminal

For example

After break

After replacing the battery

Power ON


Reconnect by wireless

Class top level


1 second at most

Access point

Scanning performance Overwhelmingly fast! Models offered with excellent distant bar code scanning and small bar code scanning!




400 scans in one second
Scan up to the depth of about 1,300 mm distance




Distant bar codes can be read without changing the scanner's posture!
[Bar code models*]
* Excluding BHT-1261BWB-CE (H) and BHT-1261BWB-CE (H-WE7)


The BHT-1200 enables super-deep-field scanning: bar codes not only close to the terminal, but also bar codes around 1,300 mm* away from the terminal can be scanned, making it possible to perform smooth scanning regardless of the scanner's position.
* When the narrow element width is approximately 1 mm




Improved resolution enables reading of small bar codes.
[BHT-1261BWB-CE (H)
[BHT-1261BWB-CE (H-WE7)]




Improved operability with a laser to indicate the decoding range and the central point [2D code model]



The corner of almost field
Decoding range




Take a photo of defective products while inspecting




Double-functional product with 5.0 megapixel-level digital camera function. Convenient auto-focus and built-in mini size light

Camera 5.0 megapixel-level digital camera

Data backup



Back up RAM data in MicroSDHC



Flash ROM with high-capacity of 2GB, use it without worries about the capacity

Durability




Usable in a cold storage and even in the open air during the summer! Operating temperature -20°C to 50°C



Cylindrical 'jacket-structure', protecting the board from impact, dust and water


Wireless WAN/GPS BHT-1261QWBG-CE only

Smooth data sending even away from offices!




High-speed 3G communication facilitates field operations!

Supports HSPA+ data communication, with a maximum download rate of 14 Mbps*. Since this product enables data communication without a mobile router even outdoors, it is suitable as a terminal for field service work such as delivery, maintenance and inspection.
* This is not the actual communication rate but the maximum technical standard value. Actual communication rate varies according to the communication environment and network conditions.




High Speed




Maximum download speed 14 Mbps

Enables fast data acquisition even outdoors




Collects accurate work history records with GPS!


Linking position coordinate information included in the GPS signal with work history records improves the accuracy of history records, helping improve work efficiency.




GPS



Obtains position information using GPS data, improving work efficiency



Map



Server



Bluetooth® + Wireless LAN and WWAN/GPS
BHT-1261QWBG-CE