

Duet®

Dual Action Scanner



Features:

- Versatility – Small footprint for virtually any point-of-sale environment
- Flexibility – Hands-free scanning for small, easily handled items, handheld scanning for bulkier items and barcoded Price Lookup (PLU) lists
- Performance – Aggressive performance and intuitive operation reduces checker training and speeds checkout for better customer service
- Smallest and lightest in its class
- EAS compatible
- Autodiscriminates UPC or EAN plus 5 industrial symbologies and supports P2, P5 & C128 add-ons
- Extensive programming options
- Data editing

Omnidirectional and Handheld Scanning – One Scanner Does Both Jobs!

With the Duet® scanner retailers can now scan anything at the point-of-sale; small items, large bulky items, even items that aren't individually bar coded. Now retailers can provide quicker checkouts and enjoy the benefits of increased accuracy of the "scan data". Most items are simply presented or swept in front of the scanner. With the Duet® scanner's unique single line capability the need to manually key items without bar codes, such as unpacked or specialty products, is eliminated. Simply direct the pointer beam that exits out the back of the scanner at a bar coded PLU list, target the correct item, press the trigger and the single line captures the data.

This single line capability eliminates misread problems often encountered with other scanners that only have an omnidirectional scan pattern. For large or bulky items you take the lightweight scanner to the bar code just as you would with a handheld scanner. It truly is two scanners in one!

Best in Class Performance


Using an advanced visible laser diode scanning system, the Duet® scanner offers a large 22,86 cm depth-of-field and wide scan area for higher performance hands-free scanning. With enhanced decoding capabilities the scanner is fast with high first-pass read rates on a variety of bar codes including labels that are long, highly truncated, partially obscured and difficult to read. It also includes the patented PSC EDGE™ software which automatically reconstructs torn or disfigured labels. And it reads labels with elements as small as 0,13 mm.

Advanced Ergonomic Design – Easy to Use, Built to Last

With two scan windows the scanner can easily adapt to either fixed or handheld scanning applications. When used as a countertop scanner, it is quick and easy to use. Hands-free omnidirectional scanning minimizes the operator's need to adjust or orient individual items. When used as a handheld scanner, the operator simply picks up the scanner and aims at one single bar code.

The lightweight specially designed case is built to survive multiple drops from a counter top to a concrete floor and resist chipping, stains, or fading on the surface. Maintenance is virtually non-existent – simply clean the scanner and window periodically.

And with the small size and footprint, the Duet® scanner fits easily where counter space is limited such as convenience stores, pharmacies and kiosks. Individual operators can adjust the scan angle with the convenient tilting and pivoting base to create a comfortable work environment.

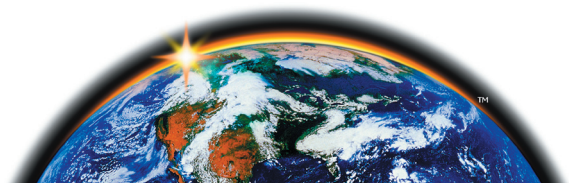

Specifications

Duet™

PRODUCT

Mechanical

Dimensions

Scanner: 7.0 x 3.4 x 2.6" / 17.8 x 8.4 x 6.6 cm
Scanner w/Stand: 8.0 x 4.3 x 4.6" /
20.3 x 10.9 x 11.6 cm

Weight

Scanner: 9.0 ozs. / 0.25 kg
Base: 10.5 oza. / 0.29 kg

Cable length: 8 or 12' / 2.4 or 3.5 m extended

Electrical

Operating voltage: 4.7V to 14.0 V DC;
5.2V to 14 V DC (Universal Wedge version)

Power consumption: 3 Watts maximum

Environmental

Temperature rating

Operating: 32° to 104° F / 0° to 40° C
Storage: -40° to 158° F / -40° to 70° C

Humidity: 5 to 95% NC

Shock (at 23° C):

Withstands five 1 m drops to concrete

Vibration: Operates in all normal retail &
office environments

Water & Dust: Resistant, IEC529 rating IP53

Communications

RS-232 (standard, SNI, Ack/Nak, Host echo)

IBM 46xx (ports 5b, 9b, E, 17)

IBM 46xx / USB Embedded w/USB Single Cable

OCIA (8 bit, 9 bit, S-P, SNI, NCR)

Standard & Universal Keyboard Wedges

Wand Emulation

Optical

Light source: 650nm Visible Laser Diode (VLD)

Scan system: Rotating polygon

Scan pattern

Omnidirectional mode: 19 lines out from the
front of the scanner

Single line mode: 1 line out from the back of
the scanner

Scan speed: 1,500 lines per second (lps)

Scan angles: 5

Scan volume: 100 cubic inches

Motor

Motor speed: 4,500 rpm

Speed to read (from motor off): <500 ms

Depth-of-Field: Refer to chart below

Resolution (minimum): 0.13 mm

Print contrast ratio: 50% minimum

Label orientation

Pitch & Skew: Front Window ±80°;

Back Window ±45°

Roll: Front Window 0° to 360°;

Back Window ±38°

Ambient light tolerance:

200 ft-candles / 2100 lux maximum

Decoding Capability

UPC A, E / EAN 8,13 / JAN 8, 13

EDGE™ stitching for UPC A, EAN 13 & JAN

Add-ons

UPC P2, UPC P5, Code 128

Industrial Codes

Code 128

Code 93

Code 39

(variable length, fixed length label stitching)

Interleaved 2 of 5

Codabar

MSI / Plessey

2 label read

Full label editing

Autodiscriminate UPC EDGE with Add-ons

& 5 industrials

RSS 14 omni-stacked and expanded (optional)

Safety & Regulatory

Electrical: Gost R; TÜV; UL; cUL

Emissions: Complies to PCC-A, 47 CFR Part 15J;

BCIA CNS 13438; EN 55022-B; AS/NZS 3548;

VCCI-B

Laser classification: CDRH Class IIa;

(CAUTION: Laser Radiation –

do not stare into beam);

IEC 60825 Class 1



Other

EAS compatibility: Integrated EAS hardware

will work with Counterpoint IV, V, VI, and VII

models available from Checkpoint Systems.

Depth-of-Field Chart – (printing resolution, contrast and ambient light dependent)			
Label Density	Range		
5 mil	1.0" to 2.5"	2.5 to 6.4 cm	
7.5 mil	0.0" to 6.0"	0.0 to 15.2 cm	
10 mil	0.0" to 7.0"	0.0 to 17.8 cm	
13 mil	0.0" to 9.0"	0.0 to 22.9 cm	

Available Mount



P/N: 7-0610

Gooseneck Flexible (flat stand)



Versatile scanner: operates as a
stand-alone or handheld scanner

Corporate Headquarters

PSC Inc.

959 Terry Street

Eugene OR 97402-9150 USA

Tel: 800 695 5700 or 541 683 5700

Fax: 541 345 7140

Specifications are subject to change without notice.

Additional information concerning this product or other PSC products

and services can be found at the PSC website: www.pscnet.com,

or contact your PSC representative for more information.



PSC Worldwide Sales and Service locations

Australia - NSW

Tel: 61 2 9878 8999

Fax: 61 2 9878 8688

Australia

Tel: 61 3 9281 3288

Fax: 61 3 9243 5510

Belgium

Tel: 32 2 44 74 09

Fax: 32 2 410 11 63

Brazil

Tel: 55 11 5507 7721

Fax: 55 11 5507 7696

Chile

Tel: 562-339-7000

Fax: 562-339-7985

China

Tel: 86 10 6857 9048

Fax: 86 10 6857 8699

China - South

Tel: 86 20 8765 9955

Fax: 86 20 8765 9955

France

Tel: 33 1 64 86 71 00

Fax: 33 1 64 46 72 44

Germany

Tel: 49 6151 93580

Fax: 49 6151 935858

Hong Kong

Tel: 852 25846210

Fax: 852 25210291

India

Tel: 91 11 4621586

Fax: 91 11 4623305

Italy

Tel: 39 039 629031

Fax: 39 039 6859496

Japan

Tel: 81 3 3491 6761

Fax: 81 3 3491 6656

Latin America

Tel: 1 305 539 0111

Fax: 1 305 539 0206

Singapore

Tel: 65 435 1311

Fax: 65 226 1242

Spain

Tel: 34 91 203 65 00

Fax: 34 91 203 65 01

Sweden

Tel: 46 4010 84 92

Fax: 46 4010 84 91

Turkey

Tel: 90 212 23691 15

Fax: 90 212 23691 16

United Kingdom

Tel: 44 1923 809500

Fax: 44 1923 809505